

Tigerloop Combi 3M

For de-aeration of oil/fuel supply lines

Oil heated boilers, furnaces, ovens, portable heaters, dryers, incinerators, etc.

NEW MODEL

The New Tigerloop® Combi 3M offers an integrated shut-off valve for simple filter change and service. The integrated SIKU Magnum oil filter offers excellent oil filtration from 50 - 70 microns. There is an optional integrated vacuum gauge for full control and easy troubleshooting. The bracket has also been strengthened. The installation is done with fewer connections simplifying the installation and reducing the risk of leakage.



SPX FLOW TECHNOLOGY SWEDEN AB


Bryggavägen 113

SE-17831 Ekerö, Sweden

P: +46 (0)8 560 340 30

F: +46 (0)8 560 342 60

E: tigerholm@spx.com

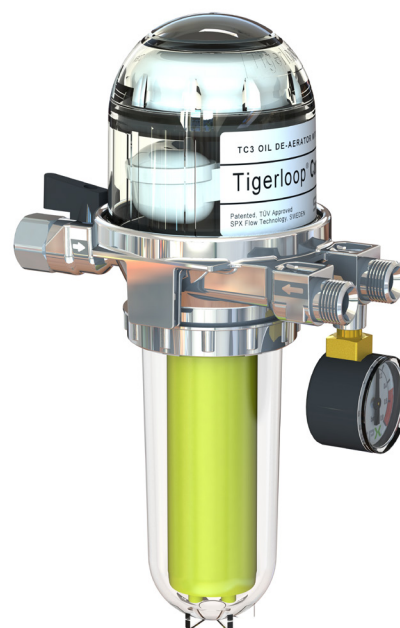

Technical data:

Max. nozzle capacity:	110 l/h (90 kg/h)
Max. oil flow:	230 l/h (190 kg/h)
Max. operating temp:	60° C
Max. ambient temp:	60°C
Max. operating pressure:	+0.5 bar
	-0.6 bar
Pump connections:	1/4" female thread
	3/8" male thread
Tank connections:	3/8" female thread

Tigerholm™ Series