
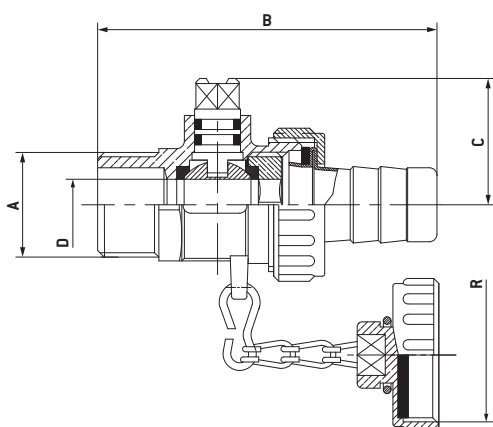
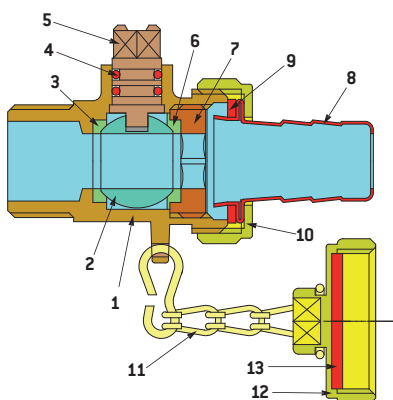


7756...

BOILER DRAIN VALVE

BOILER DRAIN VALVES

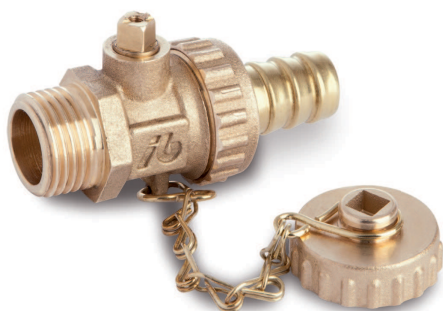

- 1/2" boiler drain valve with operating key in cap
- Finish: sandblasted
- Thread: ISO 228
- Temperature range: 0°C to +90°C

This valve is particularly indicated for shutting off generally non-corrosive fluids that are compatible with the valve materials. An excellent field of application is in plant engineering for plumbing and heating, especially as a means for discharging the heat carrier in the heating plant.

It's a reduced-bore valve and the ball seal is provided by two PTFE seats. Seal of the manoeuvring part is provided by two NBR O-rings with the stem mounted from inside and a bottom-loaded system. It is advisable to perform a complete manoeuvring cycle at least once every 3 months to prevent the formation of limescale, which would affect operation.

COMPONENTS:

POS.	PART NAME	N°	MATERIAL
1	Body	1	CW617N UNI-EN 12165
2	Ball	1	CW617N UNI-EN 12164 Chrome-plated
3	Seal	1	PTFE
4	O-ring	2	EPDM 70 Perox
5	Stem	1	CW617N UNI-EN 12164
6	Shaped retaining ring	1	PTFE
7	Ring	1	CW617N UNI-EN 12164
8	End connection	1	CW508L UNI-EN 1652
9	End connection gasket	1	SBR
10	Fly nut	1	CW617N UNI-EN 12165
11	Chain	1	Brass iron
12	Cap	1	CW617N UNI-EN 12165
13	Cap gasket	1	SBR

DIMENSIONS:

DN	A	B	C	D	R	PN
15	1/2"	67	25	10	3/4"	25

PACKAGING/PRICE:

	1/2"
CODE	77560004
PIECES PER BOX	—
PIECES PER CARTON	150
PRICE	