


Staande warmwaterboiler SE-2

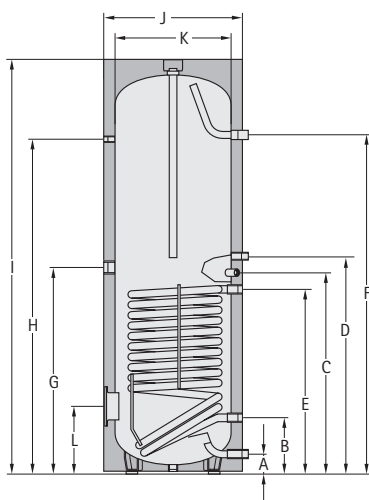

TYPE	SE-2	150	200	300	400	500	750
Boilerinhoud	ltr	145	195	300	400	500	750
Constant vermogen boiler (80/ 60 – 10/ 45 °C)	kW – ltr/ h	20 – 500	28 – 700	40 – 1000	45 – 1100	53 – 1300	60 – 1500
Vermogenskengetal	N _{LB0}	2,0	3,5	7,5	11	15	22
Koudwateraansluiting	A mm	90	90	70	79	99	220
Retour verwarming	B mm	255	255	228	314	305	345
Boilervoeler	C mm	585	720	849	885	985	990
Circulatie	D mm	665	800	1050	1004	1095	1215
Aanvoer verwarming	E mm	515	650	783	874	865	885
Warmwateraansluiting	F mm	930	1194	1450	1354	1451	1590
Aansluiting elektrische weerstand	G mm	550	685	877	949	949	945
Aansluiting thermometer	H mm	760	1024	1328	1385	1404	1460
Hoogte	I mm	996	1260	1728	1650	1788	1850
Diameter met isolatie	J mm	600	600	600	704	754	990
Diameter zonder isolatie	K mm	-	-	-	-	-	790
Flens (onder)	L mm	325	325	278	329	335	384
Kipmaat met isolatie	mm	1150	1350	1829	1794	1940	2075
Primair – Verwarmingswater	bar/ °C	10/ 110	10/ 110	10/ 110	10/ 110	10/ 110	10/ 110
Secundair – Warm water	bar/ °C	10/ 95	10/ 95	10/ 95	10/ 95	10/ 95	10/ 95
Binnendiameter flens	mm	110	110	114	114	114	114
Koudwateraansluiting	R	1"	1"	1" *	1" *	1" *	1 1/4" *
Retour verwarming	G	1"	1"	1"	1"	1"	1 1/4"
Circulatie	G	3/4"	3/4"	3/4"	3/4"	3/4"	1"
Aanvoer verwarming	G	1"	1"	1"	1"	1"	1 1/4"
Warmwateraansluiting	R	1"	1"	1" *	1" *	1" *	1 1/4" *
Aansluiting elektrische weerstand	G	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Aansluiting thermometer	G	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Oppervlakte warmtewisselaar	m ²	0,6	1,0	1,5	1,8	2,0	2,5
Inhoud warmtewisselaar	ltr	4,3	6,8	8,9	11,5	12,6	21,7
Gewicht	kg	53	65	115	145	160	260