


## Technical Data Sheet

Description: Frostproof outdoor tap „Frost – tec easy“, with sanitary handle and tee-handled socket wrench, backflow preventer and tube aerator, protection valve type HD, DVGW approved.

Item number: 00 2813 1550 001

### Technical data:

Medium:	Potable water	
Medium-Temperature:	min. 5 °C / max. 90 °C	
Operating pressure:	max. 10 bar (PN 10)	
Materials:	Body:	Brass
	Spindle:	Brass
	Connection pipe:	Copper
	Gaskets:	EPDM
	Sanitary handle:	ABS

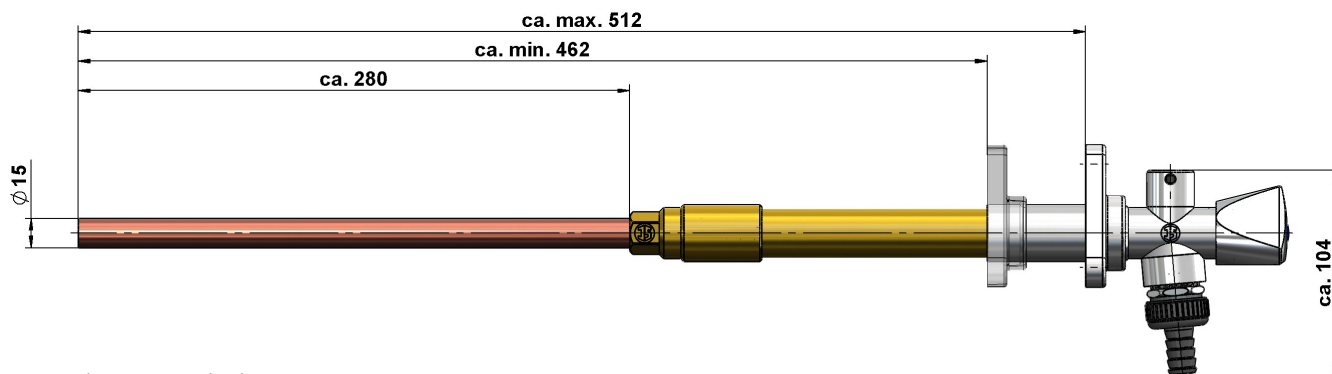

### Technical description:

Frost-tec Easy has been developed to prevent damage of outdoor taps in areas threatened by frost.

Frost-tec Easy consists of an interiorly valve with backflow preventer which is protected from frost and an exteriorly (outdoor) tap to open and close the valve. Both units are connected through a spindle.

The spindle consists of full material and is pre-mounted, as well as the tube aerator and the sanitary handle (tee-handle socket wrench is included also to be used alternatively).

Frost-tec Easy is equipped with an integrated aerator which makes sure that the tap can drain itself after closing when the outlet is free (**important: disconnect the garden hose to allow this function to work properly!**)

A second aerator also protects the system from a possible backflow effect in the hose.

Taps of this character are mandatory where the danger of backflow of dirty, toxic or harmful liquids is given (liquids till category 2, see DIN EN 1717).

To cut off water supply for the whole building, single units or apartments is not necessary during frost periods.

Frost-tec Easy is already premounted and ready to use. It has just to be fixed and installed.

**Stand: April 2015**  
**Subject to technical change**