



WARRANTY AND LEGAL INFORMATION: All flexible hoses manufactured and sold by Fixaflex NV are warranted for a period of ten years. We warrant that our flexible hoses are free of manufacturing defects. The following events are not considered to be manufacturing defects and thus cannot be covered by our warranty: (a.) normal wear and tear, aging and corrosion; (b.) accidents, disasters or after events of force majeure; (c.) misuse, wrong application and/or installation, fault or negligence of or by the Buyer or a third party; (d.) improper storage or handling of the products; (e.) improper maintenance of the products. When the Fixaflex NV inspection discloses any above mentioned defects within the warranty period, Fixaflex NV will replace the damaged Fixaflex hoses free of charge.

- The fittings, sleeves and braiding of the hose may never come into contact with cement, plaster or other aggressive materials, for ex. chemicals, aggressive cleaning products, etc.
- Do not install the flexible hoses against sharp edges, corners or rough surfaces.
- The Installation of our flexible hoses must be installed according to the rules of the art.
- Our EPDM and SILICONE hoses are destined for 'drinking' water applications. Please contact Fixaflex NV for other fluid applications.
- For technical qualities of specific flexible hoses please consult our technical data sheets
- Our flexible hoses should be treated properly - both during storage, installation and use


Before installing the flexible hose, please check that the sleeves are sufficiently pressed. When in doubt, please contact the manufacturer.



Do not install flexible hoses that are under tension or twisted



Please ensure that the length of the hose is sufficient and stress free. When in doubt contact Fixaflex NV.

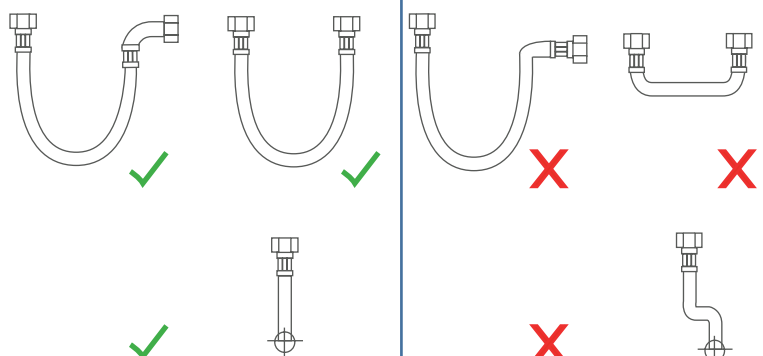




BRAIDED EPDM HOSES

CERTIFICATIONS



PLUMBING

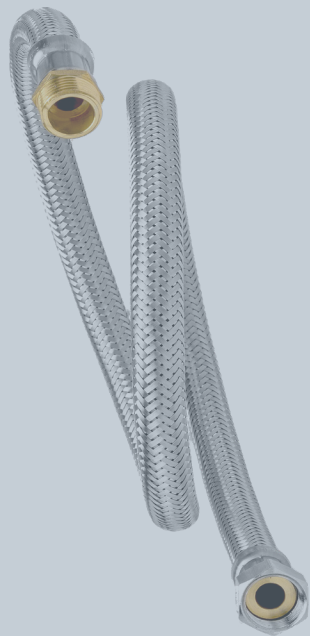


- 30°C
+ 90°C
+ 110°C

certified temp. may deviate

DN		NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN6	*	10 BAR	20 BAR	INOX 6/7x0,18 mm	6,5x9,5 mm
DN8*		10 BAR	20 BAR	INOX 8x0,18 mm	8x11,2 mm
DN10*		10 BAR	20 BAR	INOX 8x0,18 mm	10x14 mm
DN13*		10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN15*		10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN20	*	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN25	*	8 BAR	10 BAR	INOX 12x0,22 mm	25x32 mm
DN32	*	8 BAR	10 BAR	INOX 10x0,25 mm	32x42 mm
DN40	*	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm
DN50	*	6 BAR	8 BAR	INOX 10x0,25 mm	50x62 mm

* standard without certificate. Also available in QB or WRAS certification, only on demand.

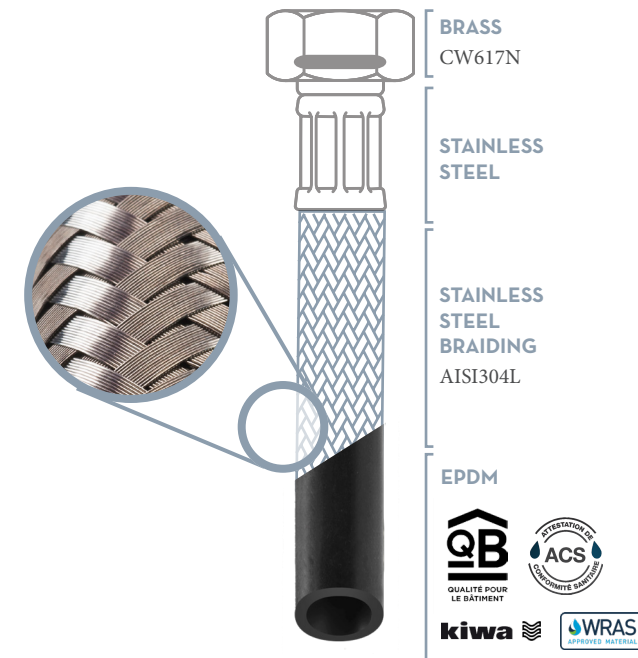


SLEEVES AND FITTINGS

DN	INOX SLEEVE DIMENSIONS	ALU SLEEVE DIMENSIONS	BORE DIAMETER FITTINGS
DN6	12x13x16 mm	-	4,5 mm
DN8	13x14x18 mm	-	6 mm
DN10	15,5x16,5x20 mm	-	7 mm
DN13	20x22x24 mm	20x22x25 mm	10,5 mm
DN15	23x24,4x29 mm	22x24x25 mm	12 mm
DN20	30x32x35 mm	30x32x31 mm	15 mm
DN25	36x38x35 mm	36x38x38 mm	19 mm
DN32	45x47x46 mm	46x49x45 mm	25,5 mm
DN40	55x57x62mm	57x60x51 mm	32 mm
DN50	67,6x70x57 mm	66,7x70x51 mm	41 mm

LENGTH NBN EN 13618

LENGTH OF HOSE	TOLERANCE
L <= 400 mm	- 0 mm / + 10 mm
400 mm < L <= 1000 mm	- 0 mm / + 20 mm
1000 mm < L <= 2000 mm	- 0 mm / + 30 mm

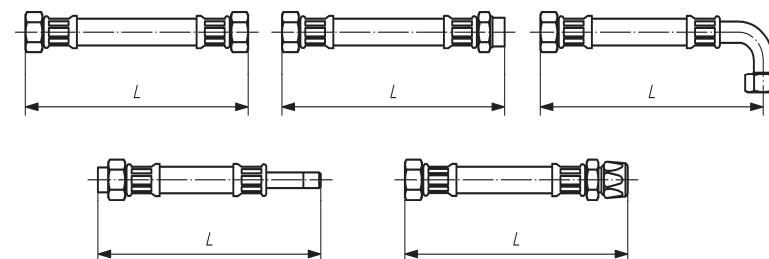



BRAIDED BUTYL HOSES

CERTIFICATIONS



DN	NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN8	10 BAR	20 BAR	INOX 8x0,18 mm	8x11,2 mm
DN10	10 BAR	20 BAR	INOX 8x0,18 mm	10x14 mm
DN13	10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN15	10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN20	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN25	8 BAR	10 BAR	INOX 12x0,22 mm	25x32 mm
DN32	8 BAR	10 BAR	INOX 10x0,25 mm	32x42 mm
DN40	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm
DN50	6 BAR	8 BAR	INOX 10x0,25 mm	50x62 mm

SLEEVES AND FITTINGS

LENGTH NBN EN 13618


OXYTIGHT
COOLING
HEATING



- 30°C
+ 90°C

DN	SLEEVE DIMENSIONS	BORE DIAMETER FITTINGS
DN10	15,5x16,5x20 mm	7 mm
DN13	20x22x24 mm	10,5 mm
DN15	23x24,4x29 mm	12 mm
DN20	30x32x35 mm	15 mm
DN25	36x38x35 mm	19 mm
DN32	45x47x46 mm	25,5 mm
DN40	55x57x62 mm	32 mm
DN50	67,6x70x57 mm	41 mm

LENGTH OF HOSE	TOLERANCE
$L \leq 400 \text{ mm}$	- 0 mm / + 10 mm
$400 \text{ mm} < L \leq 1000 \text{ mm}$	- 0 mm / + 20 mm
$1000 \text{ mm} < L \leq 2000 \text{ mm}$	- 0 mm / + 30 mm

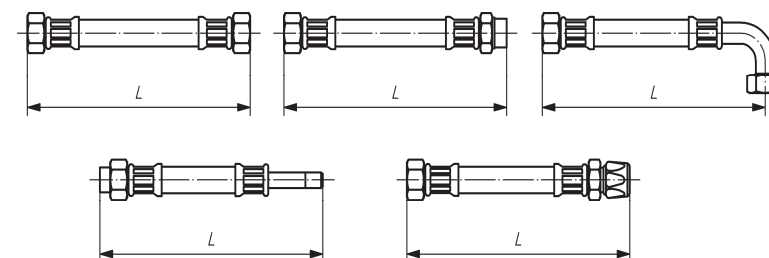




BRAIDED SILICONE HOSES

CERTIFICATIONS




DN	NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN8	10 BAR	20 BAR	INOX 8x0,18 mm	8x11 mm
DN10	10 BAR	20 BAR	INOX 8x0,18 mm	9,7x13,2 mm
DN13	10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN15	10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN20	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN25	8 BAR	10 BAR	INOX 12x0,22 mm	25x32,5 mm
DN32*	8 BAR	10 BAR	INOX 10x0,25 mm	32x40,5mm
DN40*	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm

* only available with KTW certificate

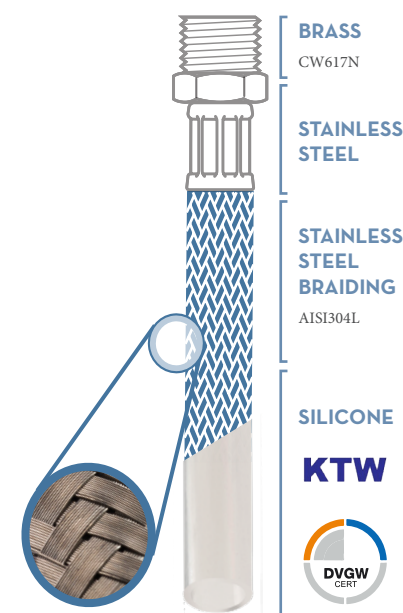

SLEEVES AND FITTINGS

LENGTH NBN EN 13618

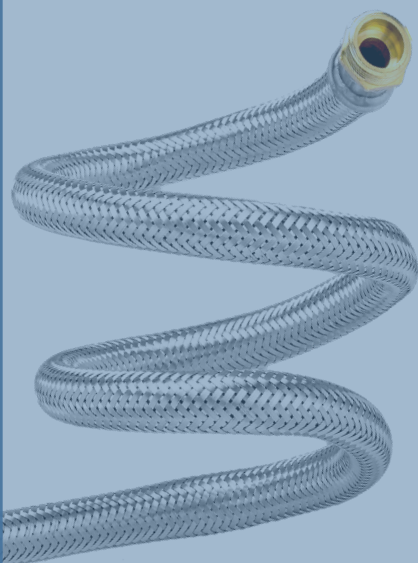

DN	SLEEVE DIMENSIONS	BORE DIAMETER FITTINGS
DN8	13x14x18 mm	6 mm
DN10	15,5x16,5x20 mm	7 mm
DN13	20x22x24 mm	10,5 mm
DN15	23x24,4x29 mm	12 mm
DN20	30x32x35 mm	15 mm
DN25	36x38x35 mm	19 mm
DN32	45x47x46 mm	25,5 mm
DN40	55x57x42 mm	32 mm

LENGTH OF HOSE	TOLERANCE
L ≤ 400 mm	- 0 mm / + 10 mm
400 mm < L ≤ 1000 mm	- 0 mm / + 20 mm
1000 mm < L ≤ 2000 mm	- 0 mm / + 30 mm

