



Trafo LED

SKU 933106

PRODUKTABBILDUNG:

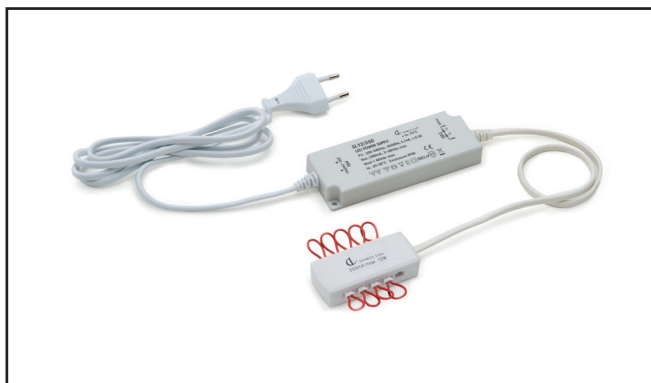

MASSZEICHNUNG:

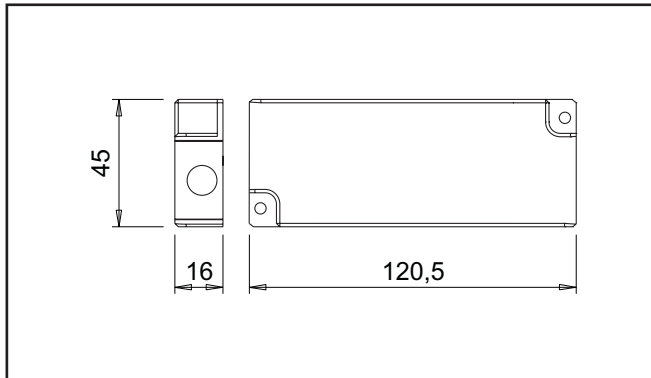

Type	Trafo LED
Ausführung	weiss
Input	220-240Vac
Output	350mA
Watt	12W
IP	IP44
Länge Anschlussleitung	2000 mm
Geprüft	CE □ ▽ IP44 ⊕ SELV 🏠
Gewicht	320 g
Garantie	5 Jahr
Extra	kombinieren mit Beleuchtung SKU 933105, SKU 933107 oder SKU 933108

- CE** The CE mark indicates that the product is conforming and satisfies all the community directives that are applicable; it guarantees the right of this product to be freely commercialized in all the states members of the European Union.
- Insulation degree II: Appliances in which electric shock protection is provided, in addition to the basic insulation, by further or reinforced insulation (also known as double insulation). In this case, the appliance does not need to be connected to the mains.
- ▽** Protection degree F: Appliances bearing the F symbol may be installed directly on normally inflammable surfaces. Normally inflammable surfaces are defined as surfaces made from materials such as wood or wood derivatives and which are more than 2 mm thick.
- IP44** Protection degree IP44: Protected against solid objects greater than 1 mm.
Protected against splashing water.
- ⊕** Independent transformer: This indicates that a transformer is approved for independent, exposed installation applications. In these cases, the transformer may be used immediately as is, without having to be incorporated into lighting units or additional casings.
- SELV** This symbol indicates that the transformer complies with the European EN 61347-1 standard. The SELV symbol (Safety Extra Low Voltage) identifies a transformer in which touching the secondary circuit outputs, even if no lamps are connected, does not constitute a hazard.
- 🏠** Inside use.